

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 12 TOWNSHIP 15 RANGE 2

DATE: 9-21-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 7-13-97


IN. S.P.C. E ZONE NAD '83

NAME: 15021201

N: 501562.3535(M)

E: 48315.5725(M)

6.

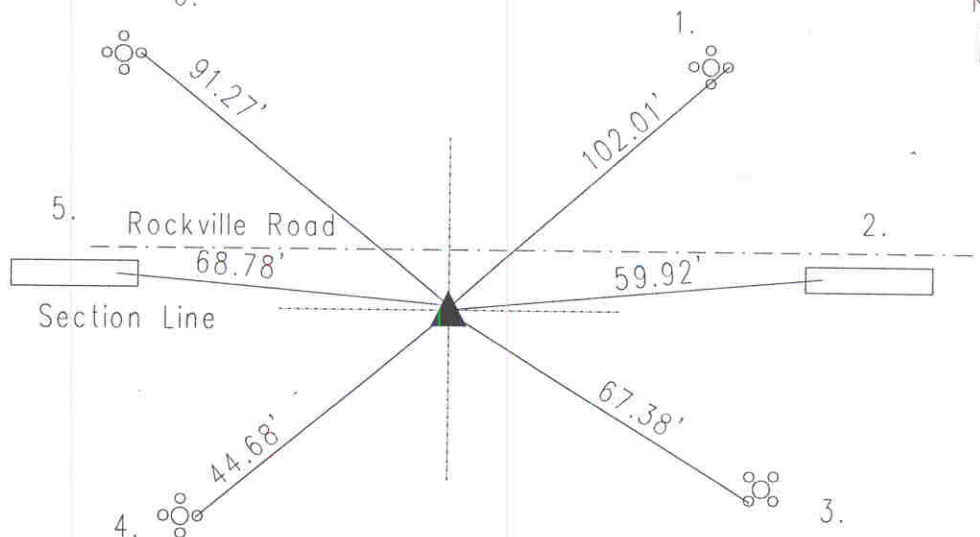

Original poset set 1820 by Laughlin with witnesses: 14" sugar N 14 E 40 links; 7" beech S 54 W 31 links per Marion County Atlas pg. 2. Hosbrook 3-26-1855 called no original witness but there is a large rock planted and supposed to be correct and satisfactory to all concerned per Wayne Township Legal Survey Book pg. 21. 6-1-48 corner dug and brass plate was tied in my MCSO . 6-5-48 called rivet set over brass plate and tied in. Monroe 3-2-58 called nail over 6" iron plate. Monroe 11-2-59 called same. Schmidt 7-18-61 called same. Hunter 3-19-62 called bronze pin. Howe 1-9-75 called brass pin. Wilcoxon 10-26-76 called brass plug. Gries 9-17-86 called same. Whiteside 1-17-95 called same. Excavated by Wilcoxon 6-3-96 Harrison set. Re-tied 9-21-03.

REF.	DISTANCE	DESCRIPTION
1.	102.01'	Cut 'x' SE-bolt of signal base
2.	59.92'	Cut 'x' W-end median
3.	67.38'	Cut 'x' SW-bolt of light pole
4.	44.68'	Cut 'x' E bolt of aluminum pole base
5.	68.78'	Cut 'x' E -end median
6.	91.27'	Cut 'x' E-bolt of aluminum pole base